

## PERFORMANCE


|                       |         |         |
|-----------------------|---------|---------|
| °F   %RH              | 80   60 | 75   50 |
| Water Removal (P/Day) | 105     | 67      |
| Efficiency (P/kWh)    | 7.5     | 5.4     |
| Energy Factor (L/kWh) | 3.55    | 2.55    |



## ELECTRICAL

|                            |                     |
|----------------------------|---------------------|
| °F   %RH                   | 80   60             |
| Supply Voltage             | 120V                |
| Current Draw               | 5.0A                |
| Recommended Breaker Size   | 15A                 |
| Power                      | 540W                |
| Power Cord                 | 9', 115 VAC, Ground |
| CFM                        | 280                 |
| BTU (Total)                | 6,800               |
| BTU (Heat of Condensation) | 4,800               |
| BTU (Motor Load)           | 2,000               |

## DIMENSIONS

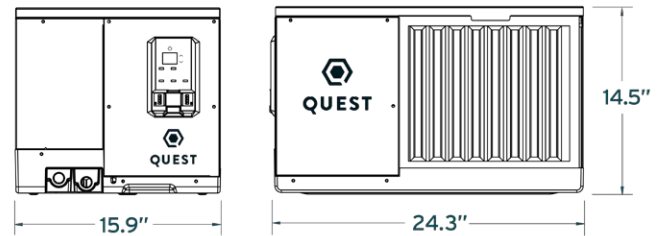

## SPECS

|                        |                             |
|------------------------|-----------------------------|
| Control Type           | Digital Onboard or External |
| Refrigerant Type       | R410a                       |
| Refrigerant Amount     | 1 lb 7 oz                   |
| Weight                 | 60 lb                       |
| Air Filter MERV Rating | MERV-13                     |
| Dimensions             | 12" x 14" x 1"              |
| Drain Port Connection  | 3/4" Threaded NPT           |
| Operating Temperature  | 56 F Min - 95 F Max         |

## FEATURES

- + **Patented M-CoRR Technology:** Achieves the highest efficiency available in the market
- + **Onboard Digital Control,** with low voltage terminal block for optional external control
- + **Superior MERV-13 Filtration:** Removes more harmful contaminants from the air, such as mold, bacteria, and virus carriers
- + **Removable Access Panel** for easy, in-place maintenance and serviceability
- + **Plug and Play:** Easy and flexible installation options with standard 110-120V outlet and no P-trap requirement.
- + **Auto-Restart** after loss of power

Specifications are subject to change without notice. Drawings are not to scale.